




Dedicated to improving vehicle fun, safety & performance

## Installation Instructions

### Serpentine Belt Removal Tool for 850s and 70 Series 1993-98

#### INSTALLATION

- 1 With engine off, insert detensioning tool into square hole and pull forward (rotate clockwise) to release tension.
- 2 Insert tensioner lock into lock position hole and remove detensioning tool.
- 3 Remove loosened belt.
- 4 Install new belt, leaving belt tensioner pulley for last. Always use the 1743mm belt and improved routing. Routing was changed so the belt contacts more of the alternator drive pulley.
- 5 Check that belt is seated in grooves on all pulleys.
- 6 Pull forward (rotate clockwise) on detensioning tool, remove lock tool and release detensioning tool (rotate counterclockwise).

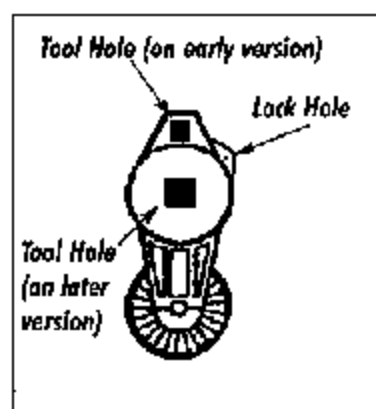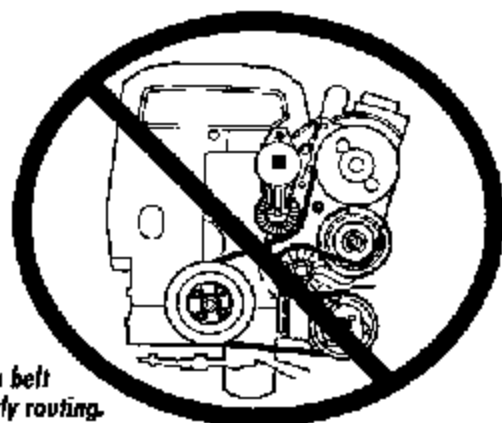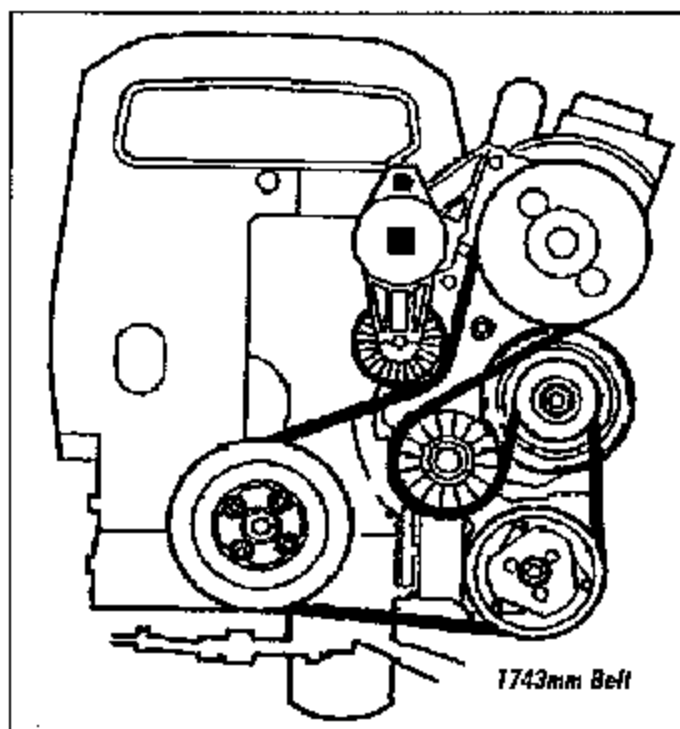

Detensioning Tool